



Item # \_\_\_\_\_

We put space to work.

Job \_\_\_\_\_

## Super Erecta Pro®

**Durable and Cleanable. The original — reinnovated.**

Corrosion resistant shelving constructed of removable polymer open grid shelf mats over a wire shelf frame. Shelf frames and posts have Metroseal epoxy coating over an electroplated substrate. Shelves with polymer mats offer a 15 year limited warranty against corrosion, while posts offer a 12 year warranty against corrosion. Microban® antimicrobial product protection is built into the frames, shelf mats, and posts. Shelf has a rigid four-sided frame with center truss(es). Robust corner provides complete 360° capture of the split sleeves and post for added stability. Stationary units have maximum capacity of 2,000 lbs. (907kg) evenly distributed. Mobile units (with stem casters) offer a maximum total unit load of 900 lbs. (408kg). Units assemble easily — shelves mount on split sleeves along grooved, numbered posts and adjust on 1" (25mm) increments.

- **Prolonged durability:** Polymer shelf mats are corrosion proof and impact resistant. They will not chip, rust, or corrode.
- **Easy to clean:** Removable polymer shelf mats can easily be lifted off the shelf frames for cleaning in sinks or wash/dish machines.
- **Strong and robust:** Steel corners, side and center supports assure a sturdy and stable weight bearing surface.

Weight capacities for evenly distributed loads:  
800 lbs. (363kg) per shelf for lengths of 24" to 48" (610 to 1220mm)  
600 lbs. (275kg) per shelf for lengths of 54" (1370mm) or longer  
2,000 lbs. (907kg) maximum per stationary unit.

- **Interchangeable:** Super Erecta Pro shelves are compatible on the same shelving units with other Super Erecta shelving options: Super Erecta wire, Super Adjustable Super Erecta, Solid Super Erecta shelves, Dunnage shelves, Cantilever shelves. Super Erecta Pro shelves can be used with Post-Type Wall Mounts, Direct Wall Mounts, SmartWall Wall Mounts, Security Units, Top Track, and qwikTRAK systems.
- **Microban Product Protection:** Microban antimicrobial product protection is built into the shelf mats and the Metroseal 3 epoxy coating to protect the product from bacteria, mold, mildew, and fungus that cause odors and product degradation. Microban protection keeps the product "cleaner between cleanings".
- **Efficient use of storage space:** Shelves can be adjusted at 1" (25mm) increments along the post to maximize the use of available vertical storage space.
- **Open Grid Shelf Mats:** Open grid shelves promote air circulation and light penetration.
- **Fast, Easy Assembly:** Super Erecta Pro units assemble easily in minutes, without tools. SiteSelect posts have numbered grooves and feature unique double grooves every 8" (203mm) to help position the shelves.
- **Warranty against rust and corrosion:** Shelves with polymer shelf mats – 15 years. Posts – 12 years. Shelf mats are constructed of polypropylene and will never rust.



For stem casters, see catalog sheet #11.20



Supports good  
**HACCP**  
processes

\*MICROBAN® and the MICROBAN® symbol are registered trademarks of the Microban Products Company, Huntersville, NC.

All Metro Catalog Sheets are available on our website: [www.metro.com](http://www.metro.com)



**InterMetro Industries Corporation**  
North Washington Street, Wilkes-Barre, PA 18705  
Product Information. U.S. and Canada: 1.800.992.1776  
Outside U.S. and Canada: [www.metro.com/contactus](http://www.metro.com/contactus)

L02-184  
Printed in U.S.A. Rev. 4/19

Information and specifications are subject to change without notice. Please confirm at time of order.

Copyright © 2018 InterMetro Industries Corp.



**Super Erecta Pro® Shelves**

**10.80**




We put space to work.®

# Super Erecta Pro® Shelves

## Specifications

- **Shelf frames:** Carbon steel with Metroseal 3 epoxy coating.
  - **Polymer Shelf mats:** polypropylene.
  - **Microban antimicrobial product protection** is built into the polymer shelf mats and Metroseal 3 epoxy coating.
  - **NSF listed for all environments.**
  - **Continuous Temperature:** Super Erecta Pro Shelves can be used continuously within a range of -20/120° F (-29/49° C) with intermittent exposure to 200° F (93° C).
- NOTE:** Not suitable for cart wash applications.

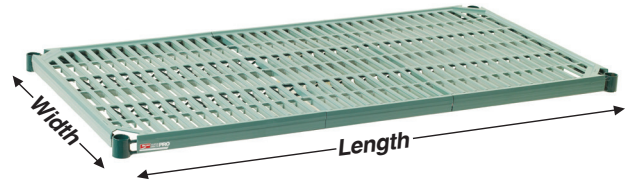

**Actual Dimensions:** Width: Add 1/4" (6mm) to nominal size.  
Length: Subtract 1/4" (6mm) from nominal size.

**Note:** Polymer Shelf mats are designed to fit Super Erecta Pro shelves and cannot be retrofitted to Super Erecta wire shelves.

**Replacement Split Sleeves**  
**Model No. 9985** Bag of four sets.

## Standard Shelves

- Part number includes shelf with removable polymer shelf mats and one bag of split sleeves

Nominal Width/Length (in.) (mm)	Approx. Pkd. Wt. (lbs.) (kg)	Model No. Super Erecta Pro Metroseal 3
18x24	457x610 6.0 2.7	PR1824NK3
18x30	457x760 7.8 3.5	PR1830NK3
18x36	457x914 9.5 4.2	PR1836NK3
18x42	457x1060 11.3 5.0	PR1842NK3
18x48	457x1219 13.0 5.8	PR1848NK3
18x54	457x1372 14.8 6.6	PR1854NK3
18x60	457x1524 16.5 7.4	PR1860NK3
18x72	457x1829 19.8 8.8	PR1872NK3
21x24	530x610 8.0 3.6	PR2124NK3
21x30	530x760 9.5 4.2	PR2130NK3
21x36	530x914 11.3 5.0	PR2136NK3
21x42	530x1060 12.5 5.6	PR2142NK3
21x48	530x1219 14.3 6.4	PR2148NK3
21x54	530x1372 16.5 7.4	PR2154NK3
21x60	530x1524 18.3 8.1	PR2160NK3
21x72	530x1829 21.5 9.6	PR2172NK3
24x24	610x610 9.5 4.2	PR2424NK3
24x30	610x760 11.3 5.0	PR2430NK3
24x36	610x914 13.0 5.8	PR2436NK3
24x42	610x1060 14.0 6.3	PR2442NK3
24x48	610x1219 15.5 6.9	PR2448NK3
24x54	610x1372 18.3 8.1	PR2454NK3
24x60	610x1524 20.0 8.9	PR2460NK3
24x72	610x1829 23.3 10.4	PR2472NK3

## SiteSelect Posts

Stationary post height includes leveling bolt.

**NOTE:** Special length posts are available. Consult your Metro representative.

## STATIONARY

Actual Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)	Model No. Metroseal 3	Model No. Stainless
14 1/2	370	1.0 0.5	13PK3	13PS
34 1/2	875	2.0 0.9	33PK3	33PS
54 9/16	1385	3.0 1.4	54PK3	54PS
62 9/16	1590	3.5 1.6	63PK3	63PS
—	—	—	—	—
74 5/8	1895	4.0 1.8	74PK3	74PS
86 5/8	2200	5.0 2.3	86PK3	86PS

## MOBILE (For use with stem casters)

Actual Height (in.)	(mm)	Approx. Pkd. Wt. (lbs.) (kg)	Model No. Metroseal 3	Model No. Stainless
13 3/4	349	1.0 0.5	13UPK3	13UPS
33 3/4	857	2.0 0.9	33UPK3	33UPS
53 13/16	1366	3.0 1.4	54UPK3	54UPS
61 13/16	1570	3.5 1.6	63UPK3	63UPS
69 3/4	1772	3.8 1.7	70UPK3	—
73 7/8	1876	4.0 1.8	74UPK3	74UPS
85 7/8	2181	5.0 2.3	86UPK3	86UPS

## KITS (Four shelves and four split posts ship in one carton)

Nominal Width/Length (in.) (mm)	Height (lbs.) (kg)	Approx. Pkd. Wt. (lbs.) (kg)	Model No.
18x36 457x914	74-5/8 1895	58.0 26.3	EZPR1836NK3-4
18x48 457x1219	74-5/8 1895	73.0 33.1	EZPR1848NK3-4
24x36 610x914	74-5/8 1895	72.0 32.6	EZPR2436NK3-4
24x48 610x1219	74-5/8 1895	83.0 37.6	EZPR2448NK3-4

**“S” Hook:** Used to “add on” one or multiple Super Erecta Pro shelving units while eliminating the cost of two posts per unit. Can be used to join units end-to-end, back-to-back, at right angles, etc. Two “S” hooks are required for each shelf. **Model No. Q9995Z**

## Notes about “add-on” units.

- Add-on (Adjacent) units must be configured entirely of one style of shelf. (Example: Adjacent unit may be configured entirely of Super Erecta Pro OR entirely of Super Erecta Wire/Super Adjustable shelves.)
- To connect an adjacent Super Erecta or Super Adjustable Super Erecta wire shelving unit to a Super Erecta Pro unit using S-hooks, the adjacent unit must use S-hook model number Q9995Z.
- A mixed shelving unit having a combination of Super Erecta Pro, Super Erecta wire, and Super Adjustable cannot be connected to another unit with “S” Hooks.

